




# Thermafiber® Impasse® System

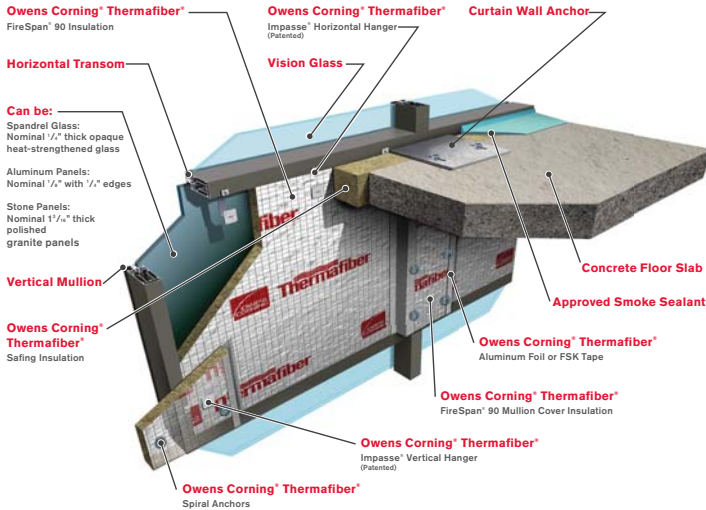

## Description

Thermafiber® Impasse® Curtain Wall Perimeter Fire Containment System is a patented design that streamlines the installation of curtain wall insulation by changing the order of traditional installation steps to fit a logical progression and take full advantage of the fire resistive, enhanced acoustical performance, and vapor barrier properties of Thermafiber® FireSpan® and Safing insulations. Traditional curtain wall insulation systems call for installation of impaling pins on spandrel panels before installation of insulation. The insulation is then impaled onto the pins. The Thermafiber® Impasse® System is unique in that the hangers are inserted into the insulation before the insulation is installed into the panels. This technique saves time and money. The Impasse® system is tested and rated with UL® laboratories and provides up to 3\* hours of fire containment.

\*See individual listings for hourly F rating.

## Perimeter Fire Containment Systems

UL® Approved Designs per ASTM E 2307			
CW-D-1014	CW-D-1021	CW-D-2046	CW-D-2052
CW-D-1015	CW-D-1022	CW-D-2047	CW-D-2055
CW-D-1016	CW-D-2039	CW-D-2048	CW-S-2058
CW-D-1017	CW-D-2040	CW-D-2049	CW-S-2059
CW-D-1020	CW-D-2041	CW-D-2051	

For additional job specific details and accessory materials necessary to complete the Perimeter Fire Containment System, please refer to UL® design listing.<sup>1</sup>

<sup>1</sup> Underwriters Laboratories (UL) Designs, Fire Resistance Directory, UL, 333 Pfingsten Road, Northbrook, IL 60062.

See Owens Corning publication "Enclosure Solutions Perimeter Fire Containment System E2307 Curtain Wall Technical Bulletin" (Pub. No. 10020920) for more information.

## Product Options

- Impasse® Hangers, vertical and horizontal
- Impasse® Locking Washers
- Spiral Anchors
- FireSpan® 90 Insulation
- Safing Insulation

## Availability

Product		Sizes
Impasse® Vertical Hanger**		2" – 5" 1/2" increments
Impasse® Horizontal Hanger**		2" – 5" 1/2" increments
Impasse® Locking Washers		1 size
2 3/4" Spiral Anchor*** (used w/ 1" thick mullion covers)		500, 1000, or 2000 pieces per carton
3 3/4" Spiral Anchor*** (used w/ 2" thick mullion covers)		500, 1000, or 2000 pieces per carton

\*\* Hanger Size = insulation thickness. Custom sizes and designs are available upon request.

\*\*\* Spiral Anchors should be at least 1 3/4" longer than the thickness of the mullion cover.

## Thermafiber Insolutions®

Thermafiber Insolutions® offers industry leading technical and engineering assistance to architects, specifiers, and contractors. These services include CAD drawings, engineering judgments, LEED® Credit Information, and product recommendations. Contact our technical services department at 1-888-834-2371 or email [ThermafiberInsolutions@owenscorning.com](mailto:ThermafiberInsolutions@owenscorning.com).

## Features

- Provides up to 3\* hours of fire containment in curtain wall systems
- Patented design
- Saves time and money over traditional jobsite installation methods
- Great for factory installing curtain wall insulation
- Designed for easy installation
- Requires installation of fewer mechanical attachments
- UL® approved and listed system

## Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high quality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at [www.owenscorning.com](http://www.owenscorning.com).

## Submittal Approvals

Job Name \_\_\_\_\_  
Contractor \_\_\_\_\_  
Date \_\_\_\_\_



The Thermafiber® Impasse® Insulation Hanger System was used to install various Thermafiber® mineral wool products in the perimeter fire containment system at 353 N. Clark in Chicago, IL. Thermafiber® mineral wool insulation contributed to this building's LEED® Gold status.



Made in the USA



# Thermafiber®

**THERMAFIBER, INC.**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659

**888-TFIBER1 [834-2371]**  
**[www.thermafiber.com](http://www.thermafiber.com)**

Pub. No. 10021131. Printed in U.S.A. November 2016.  
THE PINK PANTHER™ & © 1964–2016 Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.  
© 2016 Owens Corning. All Rights Reserved. © 2016 Thermafiber, Inc.  
All Rights Reserved.



## Disclaimer of Liability

Thermafiber, Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Thermafiber, Inc. liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing within thirty (30) days from date it was or reasonably should have been discovered. UL and the UL logo are trademarks of UL LLC.